

Type N F/M Bulkhead Coaxial RF Surge Protector, 300MHz - 1.2GHz, DC Block, 2.5kW, IP67, .0075uJ, 40kA, Filter



TUSX-NFM

Features

- Surge current of 40kA
- Max Power 2.5kW
- Frequency range from 300 MHz to 1.2 GHz
- Waterproof IP67 rated
- N Female to N Male connectors
- DC Block
- VSWR <1.1:1
- Low insertion loss
- CE & RoHS compliant
- Bidirectional

Applications

- Cellular communication systems
- Public safety systems
- Emergency response systems
- Industrial Communications

Description

RF surge protector (also known as lightning arrester) TUSX-NFM from PolyPhaser utilizing a patented spiral inductor design enables an almost instantaneous response to a lightning surge to protect critical hardware while maintaining the RF performance. This RF surge protector component is manufactured in a coaxial in-line design with wide operating frequency range. All PolyPhaser RF surge protector products are available in stock with same day shipping.

Electrical Specifications

Description	Surge Protector Type DC Handling		Surge Filter DC Block		Units
	Minimum	Typical	Maximum		
Frequency Range	0.3		1.2		GHz
Impedance		50			Ohms
VSWR			1.1:1		
Insertion Loss			0.1		dB
Input Power, CW			2.5		kWatts
Surge Current IEC 61000-4-5 8/20µs waveform			40		kA
Throughput Energy for 3kA @ 8/20µs waveform			7.5		nJ

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Type N F/M Bulkhead Coaxial RF Surge Protector, 300MHz - 1.2GHz, DC Block, 2.5kW, IP67, .0075uJ, 40kA, Filter TUSX-NFM](#)

Type N F/M Bulkhead Coaxial RF Surge Protector, 300MHz - 1.2GHz, DC Block, 2.5kW, IP67, .0075uJ, 40kA, Filter



TUSX-NFM

Mechanical Specifications

Size

Length	3.36 in [85.34 mm]
Width/Diameter	1.73 in [43.94 mm]
Housing Material and Plating	Brass

Configuration

Input Connector	N Female
Output Connector	N Male

Environmental Specifications

Temperature

Operating Range	-50 to 85 deg C
Storage Range	-50 to +85 deg C

Ingress Protection (IP) Rating	IP67
Vibration	1G at 5Hz to 100Hz

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

PolyPhaser protects and increases the reliability of global RF communications networks, including transportation, telecommunications, defense, security and industrial applications, with superior RF surge protection technologies including DC Block, DC Pass and Ultra Low PIM. Backed by responsive service and expert technical support PolyPhaser continually expands its product offering and services to serve engineers' urgent needs for RF components in mission critical communication networks.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Type N F/M Bulkhead Coaxial RF Surge Protector, 300MHz - 1.2GHz, DC Block, 2.5kW, IP67, .0075uJ, 40kA, Filter TUSX-NFM](#)

URL: <https://www.polyphaser.com/type-n-surge-protector-1.2ghz-filter-tusx-nfm>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. PolyPhaser reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. PolyPhaser does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and PolyPhaser does not assume any liability arising out of the use of any part or documentation.

Type N F/M Bulkhead Coaxial RF Surge Protector, 300MHz - 1.2GHz,
DC Block, 2.5kW, IP67, .0075uJ, 40kA, Filter

TUSX-NFM CAD Drawing

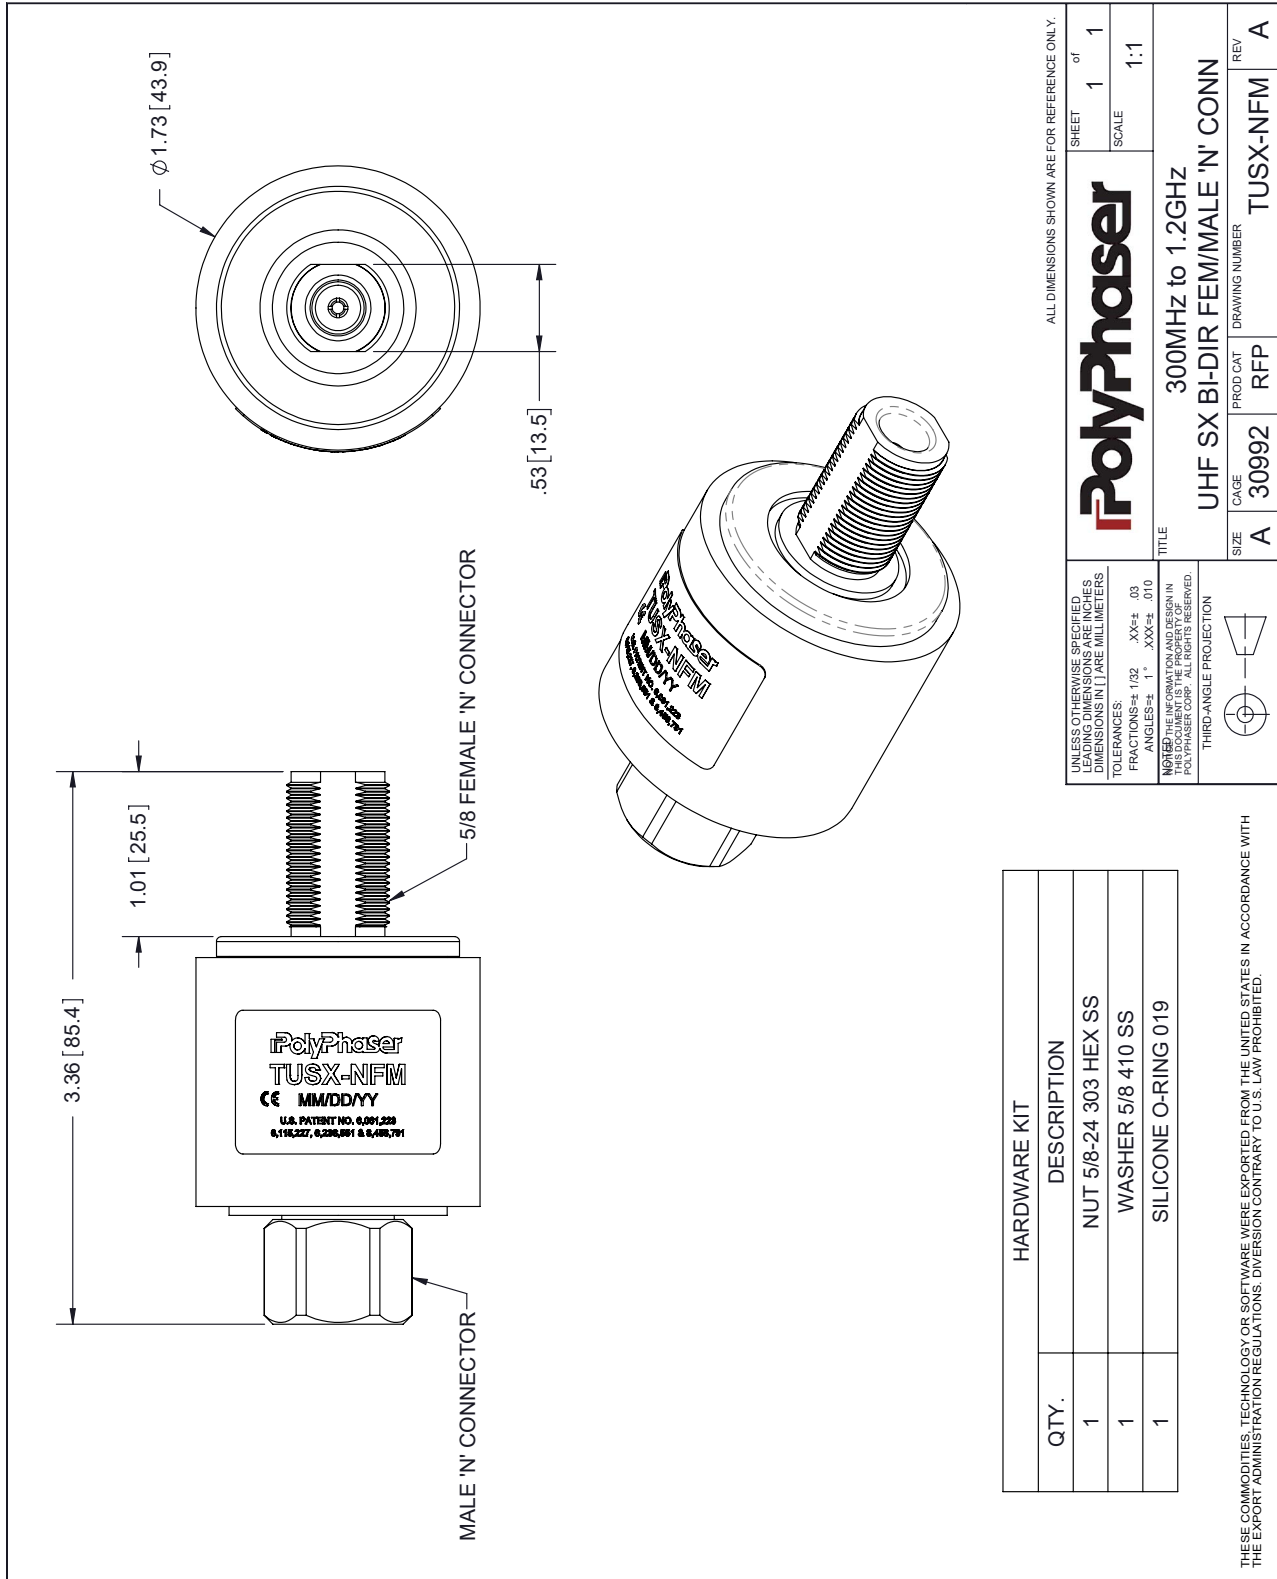

HARDWARE KIT	
QTY.	DESCRIPTION
1	NUT 5/8-24 303 HEX SS
1	WASHER 5/8 410 SS
1	SILICONE O-RING 019

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

PolyPhaser

300MHz to 1.2GHz
UHF SX BI-DIR FEM/MALE 'N' CONN

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
FRACTIONS ± 1/32 .XXF ± .03
ANGLES ± 1° .XXX ± .010

NOTE: THE INFORMATION AND DESIGN IN THIS DRAWING IS THE PROPERTY OF POLYPHASER CORP. ALL RIGHTS RESERVED.

THIRD-ANGLE PROJECTION

SIZE	A	CAGE	30992	PROD CAT	RFP	DRAWING NUMBER	TUSX-NFM	REV	A
------	---	------	-------	----------	-----	----------------	----------	-----	---

SHEET 1 of 1
SCALE 1:1

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.